

FEATURES:

- Rural fire for properties of 2ha or more (not clean-air zones)
- Warm air is convected around the room, combined with radiated heat
- Ideal for larger homes
- Matt black design with external tiles, 6mm Steel
- Clay refractory brick lined firebox
- A water booster (wetback) can be added to this fire

SPECIFICATIONS:


- Estimated maximum heat output: 20kW
- Heats area up to 260m² (typically up to five standard rooms)




KWF296-6068



INSTALLATION CLEARANCES:

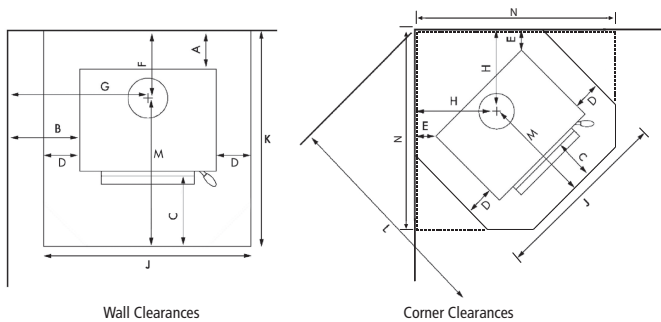

DIMENSIONS (mm):

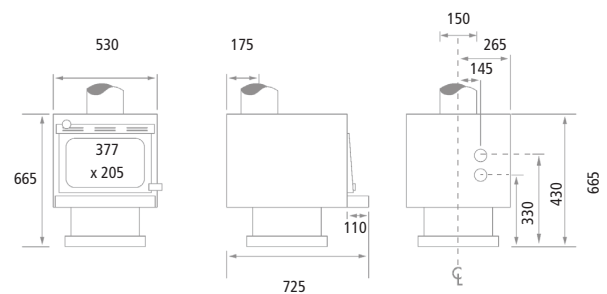

RECOMMENDED FLUE KITS:

| | |
|--------------|-------------|
| Standard | KWF298-7005 |
| Energy Saver | KWF298-7006 |

Flue kits are tested to AS/NZS2918 Appendix F report no. 02/649.

| Minimum Installation Clearances (with flue shield) mm | | | | | | | | Hearth Clearances (mm) | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|------------------------|------|------|-----|------|
| A | B | C | D | E | F | G | H | J | K | L | M | N |
| 100 | 300 | 300 | 145 | 150 | 275 | 565 | 457 | 820 | 1015 | 1385 | 740 | 1200 |